


# Backlight · BD2 SERIES Red 625 nm

lumher



24 V  
DC

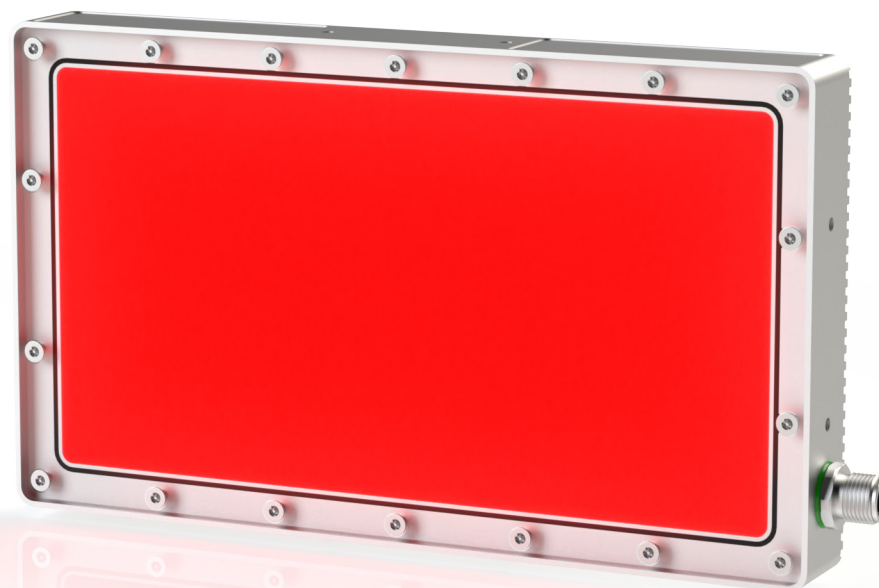

IP65



M12A



MACHINE VISION

POWER 1x  
STROBE 4x



POLARIZED

36  
MONTHS



MADE IN SPAIN


## Technical specifications

Power supply voltage	24 Vdc $\pm$ 5%	
Trigger input	24 Vdc PNP	
Max. on time	Power = unlimited	Strobe = 10 ms
Max. working cycle	Power = 1	Strobe = 1/6
Max. number of cascable modules	This luminaire is not cascable	
Wavelength	Red	625 nm
Angle of aperture	Semidiffuse Ultradiffuse	110° 110°
Electrical protections	Transient overvoltages Polarity reversal Current sabilizer	YES YES YES
IP Rating	IP65	
Protection type	Class III	
Operating temperature	-10 a +40 °C	
Body material	Anodized aluminum	
Diffuser material	PMMA plastic	
Connection types	M12A connector	
Standards	RoHs, CE	

## Connection


M12A input	Power	Master Power - Strobe
Pin 1 - Brown	+24 Vdc	+24 Vdc
Pin 2 - White	Not connected	Not connected
Pin 3 - Blue	0 Vdc	0 Vdc
Pin 4 - Black	Not connected	Trigger PNP

### M12A Male

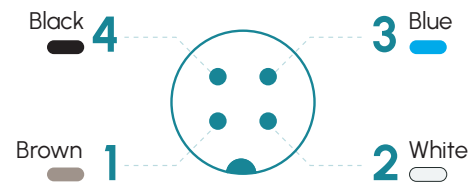

## Anchors

B00S1

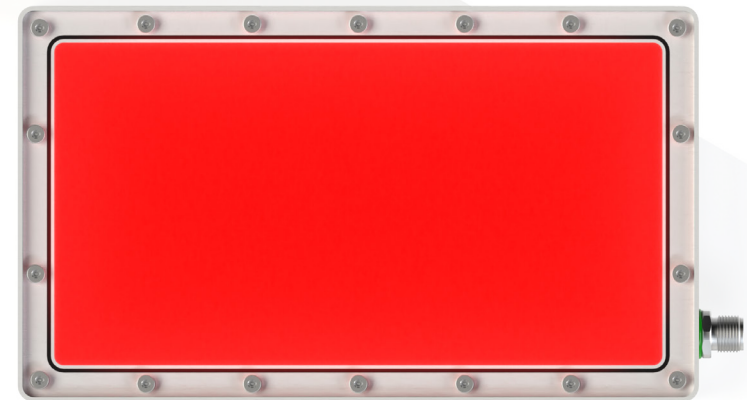


BD2 · 625 nm

lumher


## Dimensions

BD2

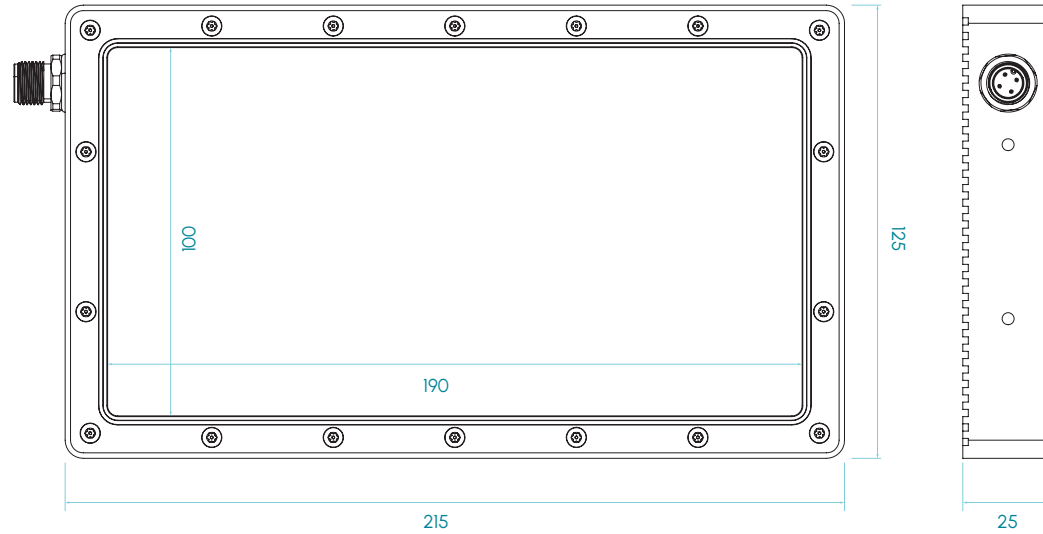

## Selection guide

BD 2 R 5 Y

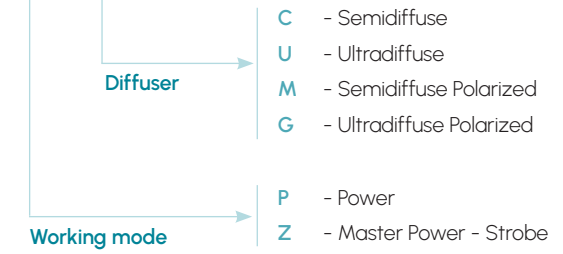


Dimensions in mm

# BD2 · 625 nm


**lumher**

## Model BD2 · Red 625 nm

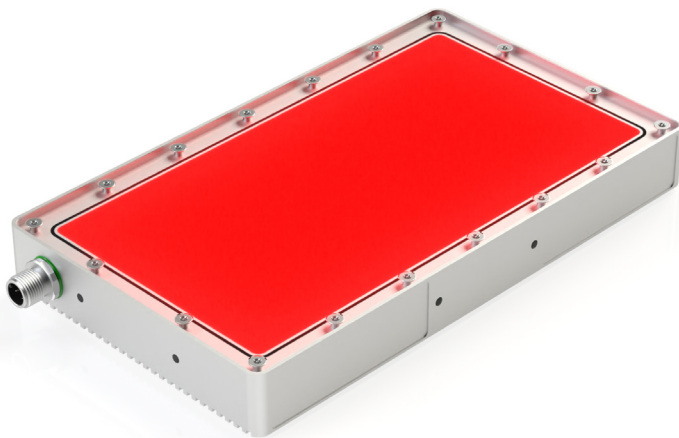

**625nm**

RED



SEMIDIFFUSE  
110°



ULTRADIFFUSE  
110°

PHOTOBIOLOGICAL  
RISK

RG1 - LOW

**60.000h**

LIFESPAN

### Table of characteristics

	Width	Length	Weight	Luminous flux <sup>(1)</sup>		Power consumed	
	(mm)	(mm)	(g)	(lm)		(W)	
				POWER	STROBE	POWER	STROBE
BD 1 ...	215	125	796	756	3.024	14,0	56,0

(1) Luminous flux (lm) is before diffuser.