

Linear · FD SERIES Infrared 850 nm

lumher



24 V
DC

MASTER
SLAVE

NOT
CASCADABLE

90 mm
INCREMENTAL

CABLE
M12A

MACHINE VISION

POWER 1x
STROBE 2x

INTEGRATED
CONTROLLER

IP40
IP65

36
MONTHS

EU
MADE IN SPAIN


Technical specifications

Power supply voltage	24 Vdc ±5%	
Trigger input	24 Vdc PNP	
Max. on time	Power = unlimited	Strobe = 10 ms
Max. working cycle	Power = 1	Strobe = 1/6
Max. number of cascable modules	This luminaire is not cascable	
Wavelength	Infrared	850 nm
Angle of aperture	Semidiffuse Ultradiffuse	60° 110°
Electrical protections	Transient overvoltages Polarity reversal Current sablizer	YES YES YES
IP Rating	IP40 o IP65	
Protection type	Class III	
Operating temperature	-10 a +40 °C	
Body material	Anodized aluminum	
Side cover material	Anodized aluminum	
Diffuser material	Polycarbonate	
Connection types	M12A, 2m cable, M12A connector with cable	
Standards	RoHs, CE	

Connection

M12A input - Cable	Power	Master Power - Strobe	Slave Power - Strobe
Pin 1 - Brown	+24 Vdc	+24 Vdc	+24 Vdc
Pin 2 - White	Not connected	Not connected	Not connected
Pin 3 - Blue	0 Vdc	0 Vdc	0 Vdc
Pin 4 - Black	Not connected	Trigger PNP	Signal IN - a

M12A Male

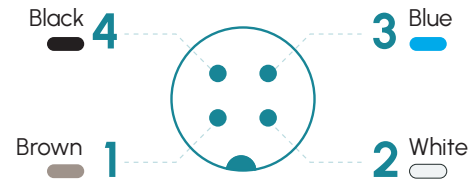

Fixings

F00G2, F00G4, F00R1, M6D16

FD · 850 nm




lumher

Measures


IP40

M12A axial version

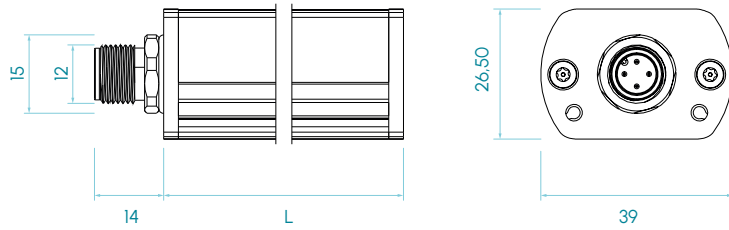

IP65


M12A axial version

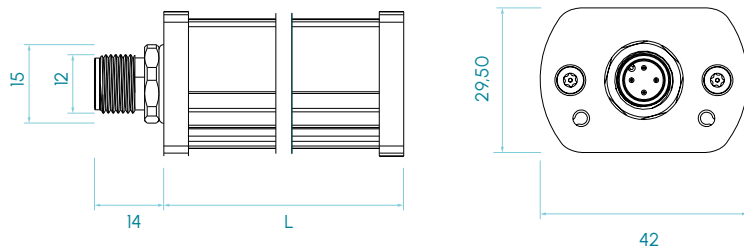

Measures in mm

FD · 850 nm

Selection guide

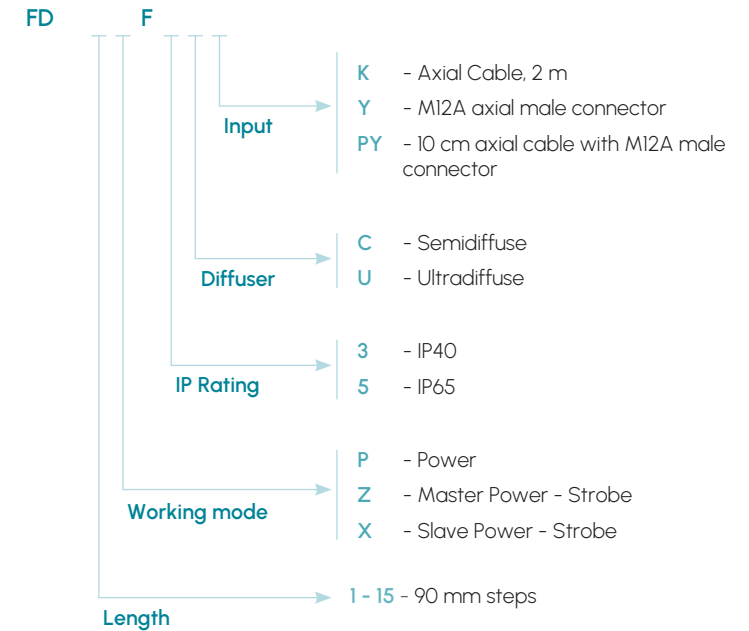

Model FD · Infrared 850 nm



850nm

INFRARED



SEMIDIFFUSE
60°



ULTRADIFFUSE
110°

PHOTOBIOLOGICAL
RISK

RG1 - LOW

60.000h

LIFESPAN

Table of characteristics

	Length	Weight	Radiated power ⁽¹⁾		Power consumed	
	L1		(W)		(W)	
	(mm)	(g)	POWER	STROBE	POWER	STROBE
FD 01...	120	256	0,8	1,6	2,0	4,0
FD 02...	210	448	1,6	3,2	4,0	8,0
FD 03...	300	640	2,4	4,8	6,0	12,0
FD 04...	390	832	3,2	6,4	8,0	16,0
FD 05...	480	1.024	4,0	8,0	10,0	20,0
FD 06...	570	1.216	4,8	9,6	12,0	24,0
FD 07...	660	1.408	5,6	11,2	14,0	28,0
FD 08...	750	1.600	6,4	12,8	16,0	32,0
FD 09...	840	1.792	7,2	14,4	18,0	36,0
FD 10...	930	1.984	8,0	16,0	20,0	40,0
FD 11...	1.020	2.176	8,8	17,6	22,0	44,0
FD 12...	1.110	2.368	9,6	19,2	24,0	48,0
FD 13...	1.200	2.560	10,4	20,7	26,0	52,0
FD 14...	1.290	2.752	11,2	22,3	28,0	56,0
FD 15...	1.380	2.944	12,0	23,9	30,0	60,0

(1) The radiated power (W) is before diffuser.

FD

lumher